

# SK55GARL065E



SEMITOP<sup>®</sup> 3

## IGBT Module

SK55GARL065E


Preliminary Data

### Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- N-channel homogeneous silicon structure (NPT-Non punch-through IGBT)
- High short circuit capability
- Low tail current with low temperature dependence

### Typical Applications\*

- Switching (not for linear use)
- Switched mode power supplies
- UPS
- Double PFC
- Multilevel inverter



GARL-E

Absolute Maximum Ratings		$T_s = 25\text{ °C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
<b>IGBT</b>			
$V_{CES}$	$T_j = 25\text{ °C}$	600	V
$I_C$	$T_j = 125\text{ °C}$	$T_s = 25\text{ °C}$	54 A
		$T_s = 80\text{ °C}$	40 A
$I_{CRM}$	$I_{CRM} = 2 \times I_{Cnom}$	120	A
$V_{GES}$		$\pm 20$	V
$t_{psc}$	$V_{CC} = 300\text{ V}$ ; $V_{GE} \leq 20\text{ V}$ ; $T_j = 125\text{ °C}$ $V_{CES} < 600\text{ V}$	10	$\mu\text{s}$


Inverse Diode		$T_s = 25\text{ °C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_F$	$T_j = 150\text{ °C}$	$T_s = 25\text{ °C}$	36 A
		$T_s = 80\text{ °C}$	24 A
$I_{FRM}$	$I_{FRM} = 2 \times I_{Fnom}$		A
$I_{FSM}$	$t_p = 10\text{ ms}$ ; half sine wave $T_j = 150\text{ °C}$	200	A

Freewheeling Diode		$T_s = 25\text{ °C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_F$	$T_j = 150\text{ °C}$	$T_s = 25\text{ °C}$	64 A
		$T_s = 80\text{ °C}$	48 A
$I_{FRM}$	$I_{FRM} = 2 \times I_{Fnom}$		A
$I_{FSM}$	$t_p = 10\text{ ms}$ ; half sine wave $T_j = 150\text{ °C}$	440	A

Module		$T_s = 25\text{ °C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
$I_{t(RMS)}$			A
$T_{vj}$		-40 ... +150	$^{\circ}\text{C}$
$T_{stg}$		-40 ... +125	$^{\circ}\text{C}$
$V_{isol}$	AC, 1 min.	2500	V

Characteristics		$T_s = 25\text{ °C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>IGBT</b>					
$V_{GE(th)}$	$V_{GE} = V_{CE}$ , $I_C = 1,4\text{ mA}$	3	4	5	V
$I_{CES}$	$V_{GE} = 600\text{ V}$ , $V_{CE} = V_{CES}$ $T_j = 25\text{ °C}$			0,0044	mA
$I_{GES}$	$V_{CE} = 0\text{ V}$ , $V_{GE} = 20\text{ V}$ $T_j = 25\text{ °C}$			240	nA
$V_{CE0}$		$T_j = 25\text{ °C}$	1,2	1,3	V
		$T_j = 125\text{ °C}$	1,1	0,9	V
$r_{CE}$	$V_{GE} = 15\text{ V}$	$T_j = 25\text{ °C}$		12	$\text{m}\Omega$
		$T_j = 125\text{ °C}$		22	$\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 60\text{ A}$ , $V_{GE} = 15\text{ V}$	$T_j = 25\text{ °C}_{chiplev.}$	1,7	2	V
		$T_j = 125\text{ °C}_{chiplev.}$	2,2	2,2	V
$C_{ies}$	$V_{CE} = 25$ , $V_{GE} = 0\text{ V}$ $f = 1\text{ MHz}$		3,2		nF
$C_{oes}$			0,3		nF
$C_{res}$			0,18		nF
$Q_G$	$V_{GE} = 0 \dots 20\text{ V}$		375		nC
$t_{d(on)}$	$R_{Gon} = 16\ \Omega$	$V_{CC} = 300\text{ V}$ $I_C = 40\text{ A}$	60	80	ns
			30	40	ns
$E_{on}$	$R_{Goff} = 16\ \Omega$	$T_j = 125\text{ °C}$ $V_{GE} = \pm 15\text{ V}$	1,1		mJ
			220	280	ns
$t_{d(off)}$			20	26	ns
			0,76		mJ
$R_{th(j-s)}$	per IGBT			0,85	K/W

# SK55GARL065E

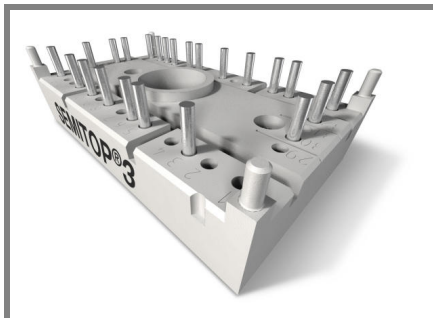

SEMITOP<sup>®</sup> 3

## IGBT Module

SK55GARL065E

Preliminary Data

### Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- N-channel homogeneous silicon structure (NPT-Non punch-through IGBT)
- High short circuit capability
- Low tail current with low temperature dependence

### Typical Applications\*

- Switching (not for linear use)
- Switched mode power supplies
- UPS
- Double PFC
- Multilevel inverter










GARL-E


Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
<b>Inverse Diode</b>					
$V_F = V_{EC}$	$I_{Fnom} = 25 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{\text{chiplev.}}$	1,45	1,7	V
		$T_j = 125 \text{ }^\circ\text{C}_{\text{chiplev.}}$	1,4	1,75	V
$V_{F0}$		$T_j = 125 \text{ }^\circ\text{C}$	0,85	0,9	V
$r_F$		$T_j = 125 \text{ }^\circ\text{C}$	22	32	mΩ
$I_{RRM}$	$I_F = 50 \text{ A}$	$T_j = 125 \text{ }^\circ\text{C}$	57		A
$Q_{rr}$	$di/dt = -2400 \text{ A}/\mu\text{s}$		4,6		μC
$E_{rr}$	$V_{CC} = 300 \text{ V}$		0,9		mJ
$R_{th(j-s)D}$	per diode			1,7	K/W
<b>Freewheeling diode</b>					
$V_F = V_{EC}$	$I_{Fnom} = 50 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{\text{chiplev.}}$	1,45	1,7	V
		$T_j = 125 \text{ }^\circ\text{C}_{\text{chiplev.}}$	1,4	1,75	V
$V_{F0}$		$T_j = 125 \text{ }^\circ\text{C}$	0,85	0,9	V
$r_F$		$T_j = 125 \text{ }^\circ\text{C}$	11	16	V
$I_{RRM}$	$I_F = 50 \text{ A}$	$T_j = 125 \text{ }^\circ\text{C}$	30		A
$Q_{rr}$	$di/dt = -800 \text{ A}/\mu\text{s}$		3,6		μC
$E_{rr}$	$V_R = 300 \text{ V}$		0,95		mJ
$R_{th(j-s)D}$	per diode			1,1	K/W
$M_s$	to heat sink		2,25	2,5	Nm
w			30		g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.


\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

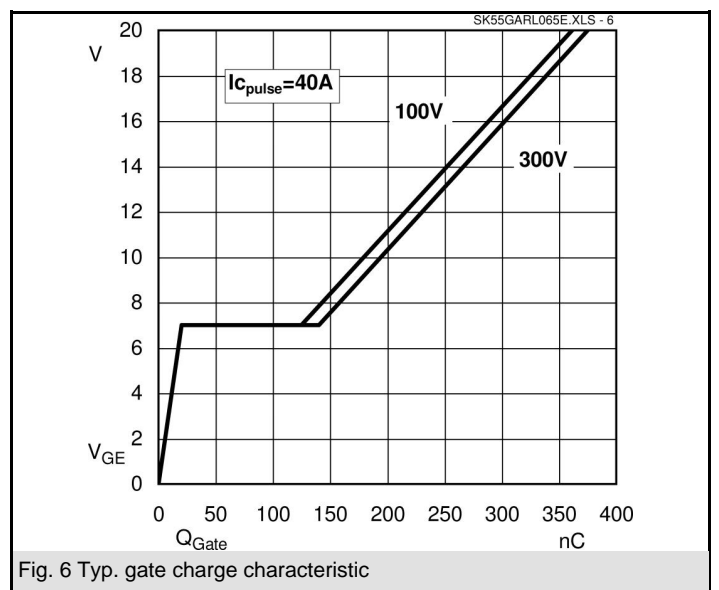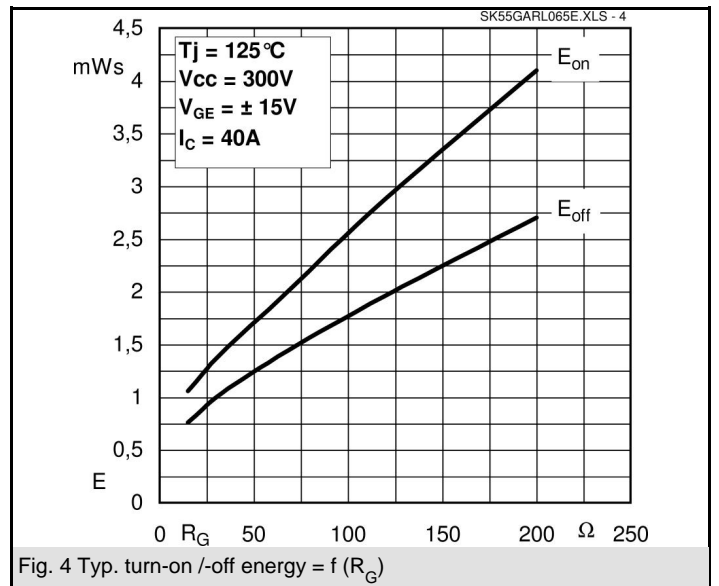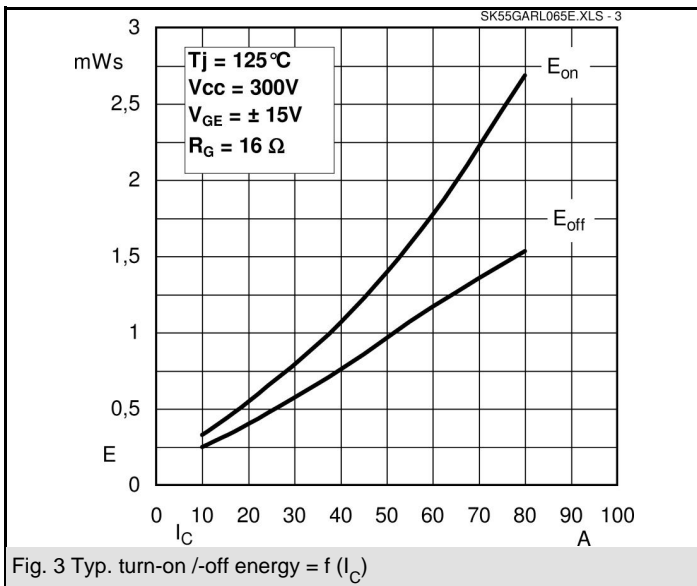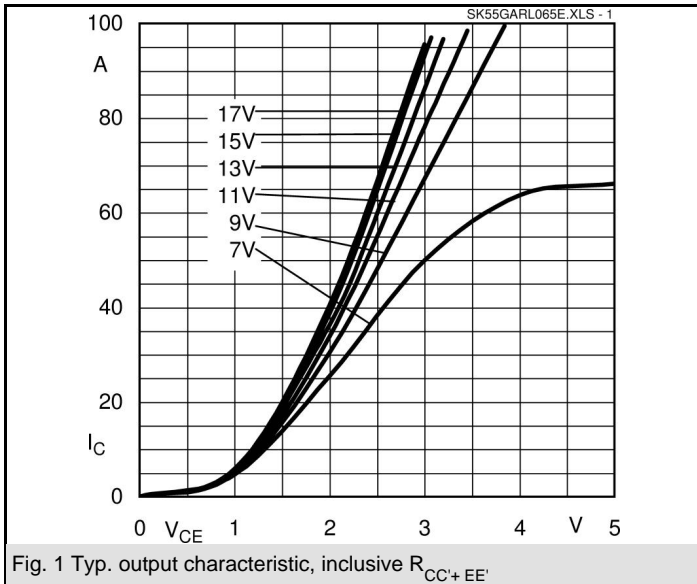

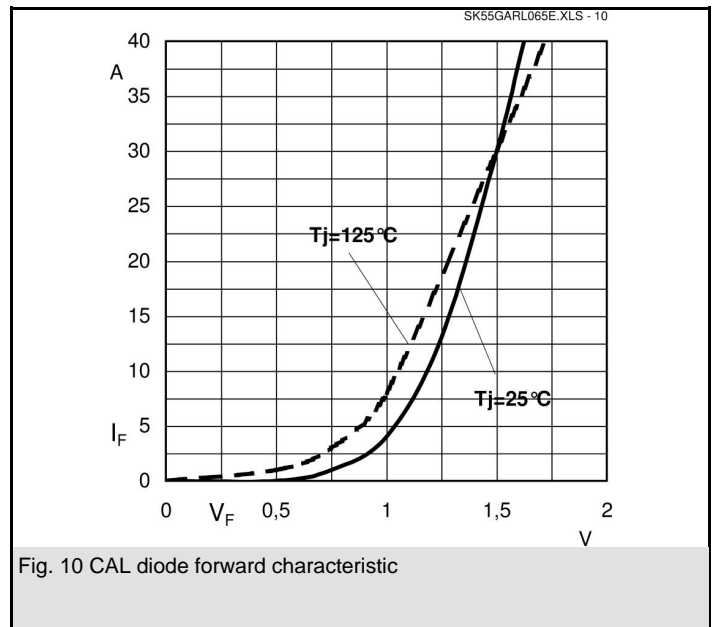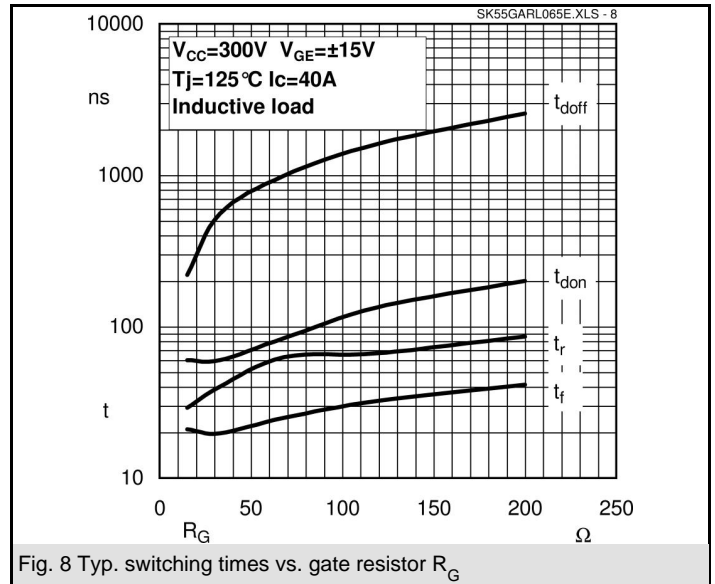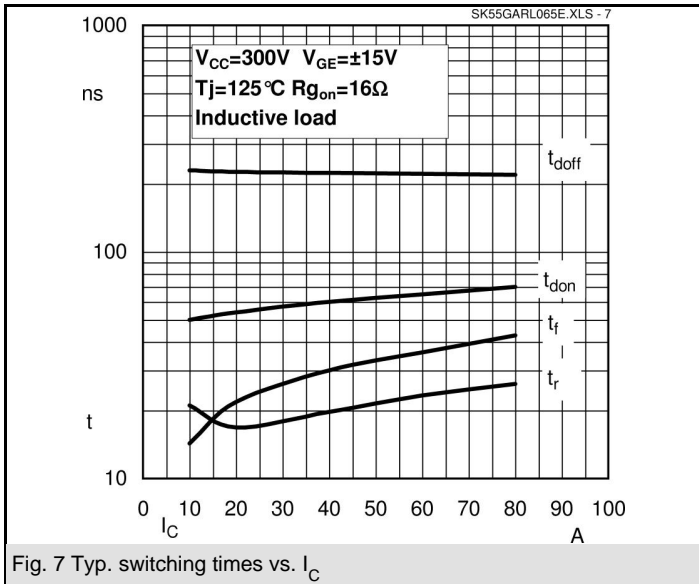

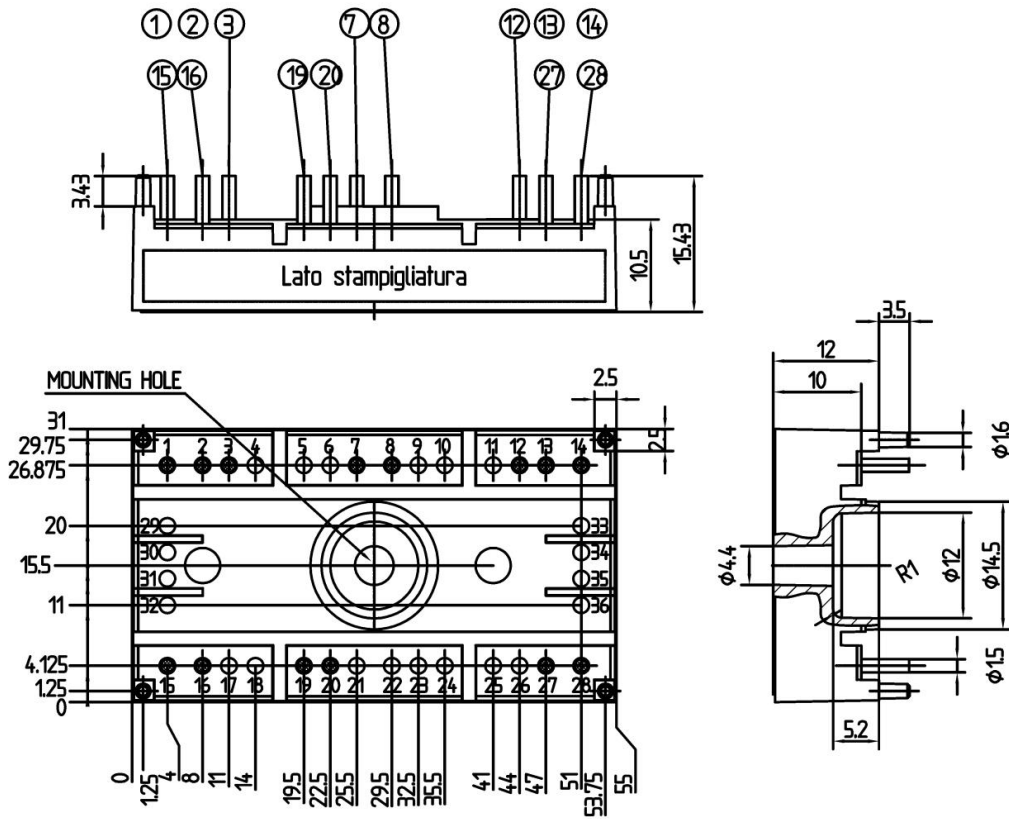

Case T55 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

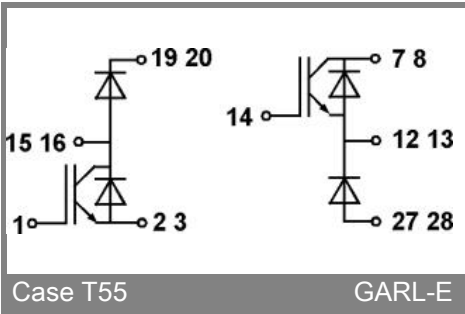

Case T55

GARL-E