

SKKT 162, SKKH 162



SEMIPACK[®] 2

Thyristor / Diode Modules

SKKT 162

SKKH 162

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532


Typical Applications

- DC motor control (e. g. for machine tools)
- Temperature control (e. g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

1) See the assembly instructions

| V_{RSM} V | V_{RRM}, V_{DRM} V | $I_{TRMS} = 250$ A (maximum value for continuous operation) $I_{TAV} = 160$ A (sin. 180; $T_c = 83$ °C) | |
|----------------|-------------------------|--|--------------|
| 900 | 800 | SKKT 162/08D | SKKH 162/08D |
| 1300 | 1200 | SKKT 162/12E | SKKH 162/12E |
| 1500 | 1400 | SKKT 162/14E | SKKH 162/14E |
| 1700 | 1600 | SKKT 162/16E | SKKH 162/16E |
| 1900 | 1800 | SKKT 162/18E | SKKH 162/18E |







| Symbol | Conditions | Values | Units |
|------------------|---|------------------------|------------------|
| I_{TAV} | sin. 180; $T_c = 85$ (100) °C | 156 (110) | A |
| I_D | P3/180F; $T_a = 35$ °C; B2 / B6 | 190 / 230 | A |
| I_{RMS} | P3/180F; $T_a = 35$ °C; W1 / W3 | 265 / 3 * 185 | A |
| I_{TSM} | $T_{vj} = 25$ °C; 10 ms | 5400 | A |
| | $T_{vj} = 125$ °C; 10 ms | 5000 | A |
| i^2t | $T_{vj} = 25$ °C; 8,3 ... 10 ms | 145000 | A ² s |
| | $T_{vj} = 125$ °C; 8,3 ... 10 ms | 125000 | A ² s |
| V_T | $T_{vj} = 25$ °C; $I_T = 500$ A | max. 1,6 | V |
| $V_{T(TO)}$ | $T_{vj} = 125$ °C | 0,85 | V |
| r_T | $T_{vj} = 125$ °C | 1,5 | mΩ |
| I_{DD}, I_{RD} | $T_{vj} = 125$ °C; $V_{RD} = V_{RRM}, V_{DD} = V_{DRM}$ | max. 40 | mA |
| t_{gd} | $T_{vj} = 25$ °C; $I_G = 1$ A; $di_G/dt = 1$ A/μs | 1 | μs |
| t_{gr} | $V_D = 0,67 * V_{DRM}$ | 2 | μs |
| $(di/dt)_{cr}$ | $T_{vj} = 125$ °C | max. 200 | A/μs |
| $(dv/dt)_{cr}$ | $T_{vj} = 125$ °C; SKK ...D / SKK ...E | max. 500 / 1000 | V/μs |
| t_q | $T_{vj} = 125$ °C | 50 ... 150 | μs |
| I_H | $T_{vj} = 25$ °C; typ. / max. | 150 / 400 | mA |
| I_L | $T_{vj} = 25$ °C; $R_G = 33$ Ω; typ. / max. | 300 / 1000 | mA |
| V_{GT} | $T_{vj} = 25$ °C; d.c. | min. 2 | V |
| I_{GT} | $T_{vj} = 25$ °C; d.c. | min. 150 | mA |
| V_{GD} | $T_{vj} = 125$ °C; d.c. | max. 0,25 | V |
| I_{GD} | $T_{vj} = 125$ °C; d.c. | max. 10 | mA |
| $R_{th(j-c)}$ | cont.; per thyristor / per module | 0,17 / 0,085 | K/W |
| $R_{th(j-c)}$ | sin. 180; per thyristor / per module | 0,18 / 0,09 | K/W |
| $R_{th(j-c)}$ | rec. 120; per thyristor / per module | 0,2 / 0,1 | K/W |
| $R_{th(c-s)}$ | per thyristor / per module | 0,1 / 0,05 | K/W |
| T_{vj} | | - 40 ... + 125 | °C |
| T_{stg} | | - 40 ... + 125 | °C |
| V_{isol} | a. c. 50 Hz; r.m.s.; 1 s / 1 min. | 3600 / 3000 | V~ |
| M_s | to heatsink | 5 ± 15 % ¹⁾ | Nm |
| M_t | to terminal | 5 ± 15 % | Nm |
| a | | 5 * 9,81 | m/s ² |
| m | approx. | 165 | g |
| Case | SKKT | A 21 | |
| | SKKH | A 22 | |

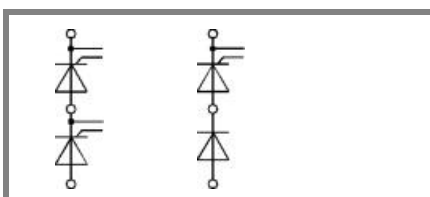





SKKT

SKKH



SKKT 162, SKKH 162

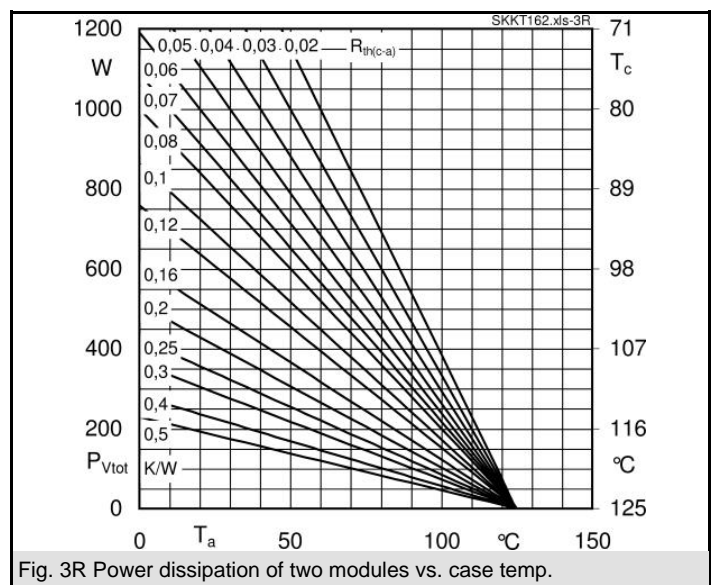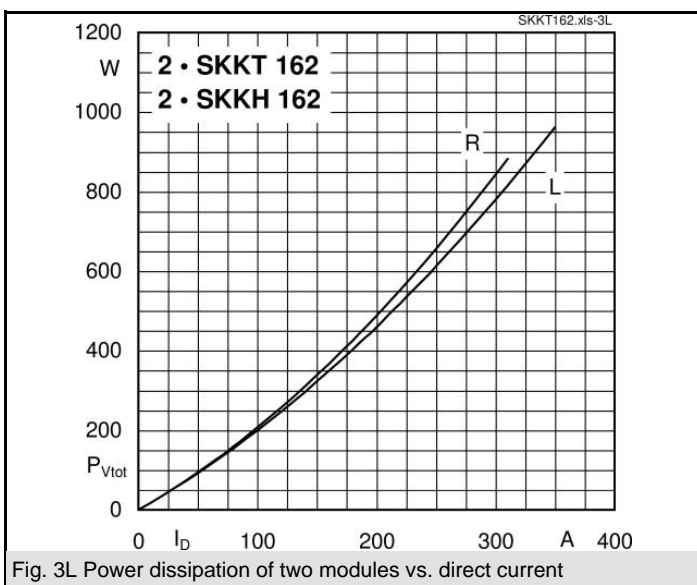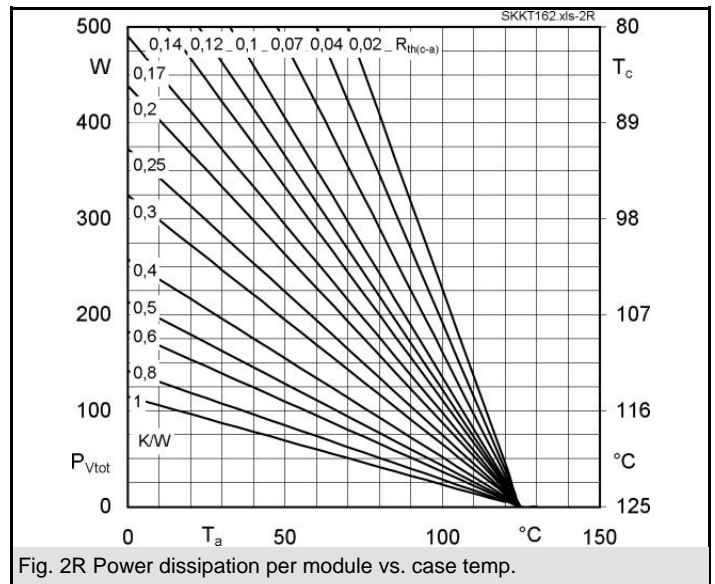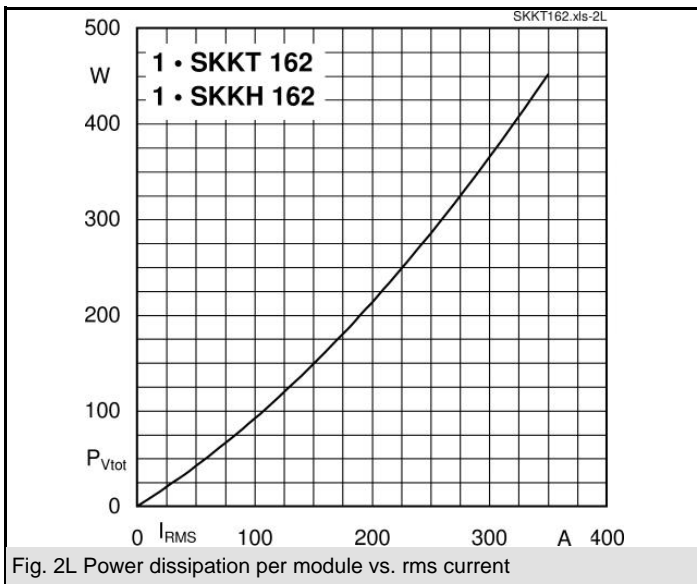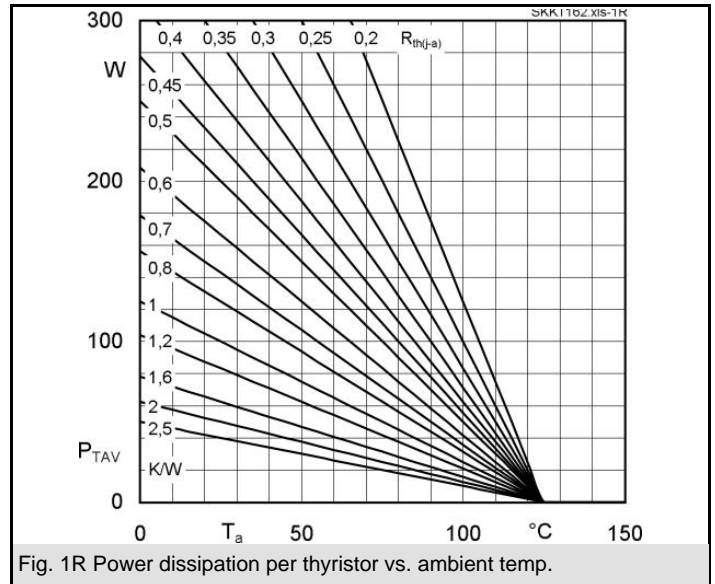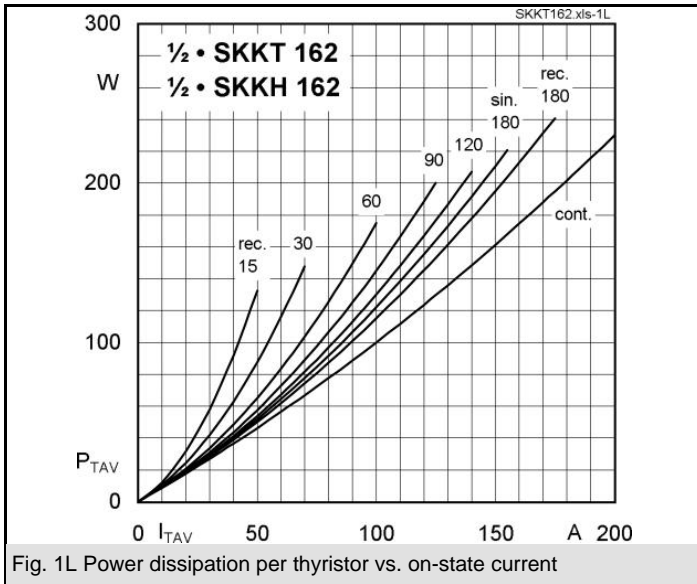

SKKT 162, SKKH 162

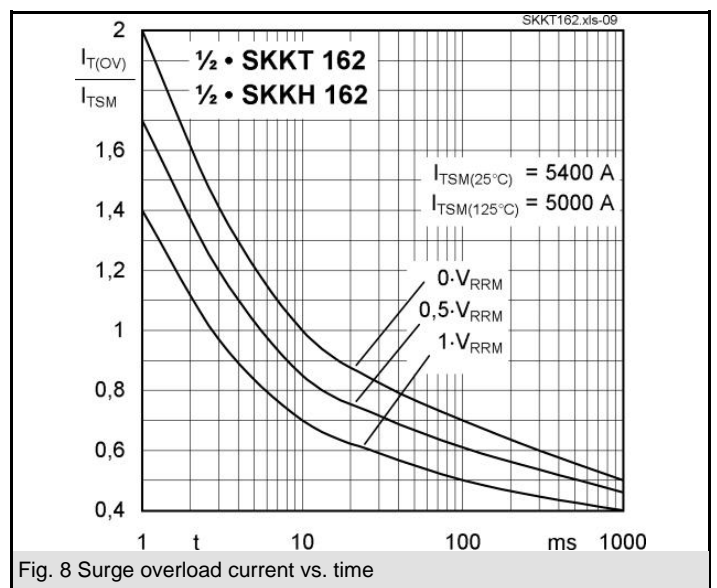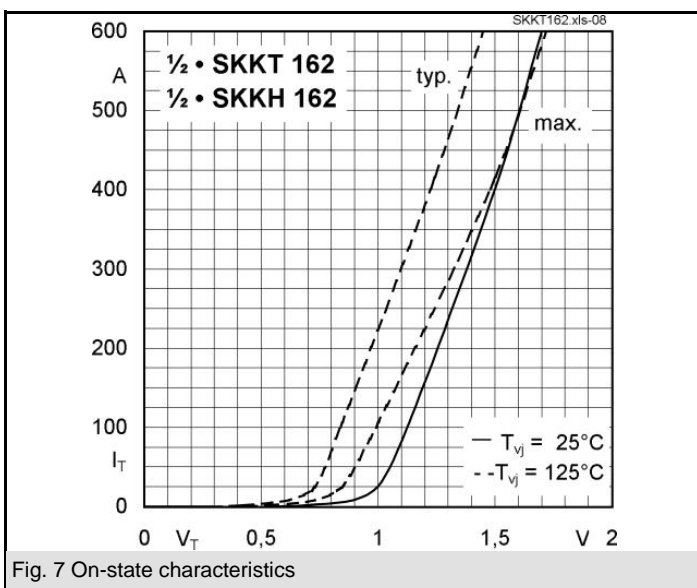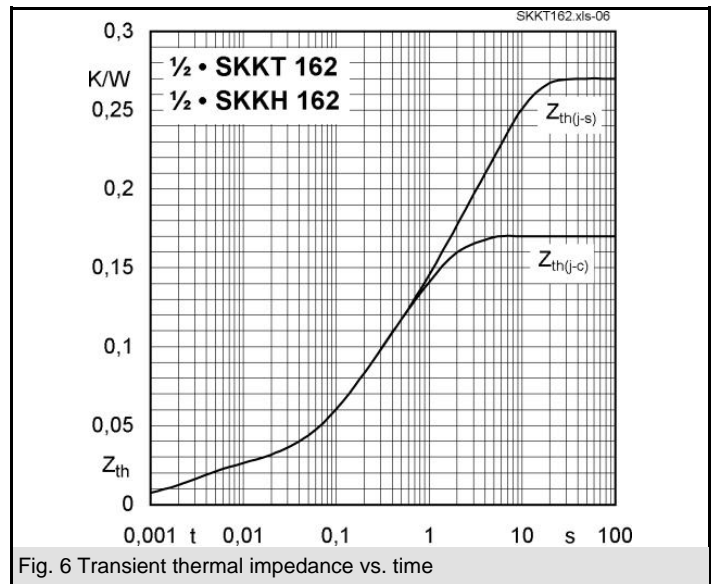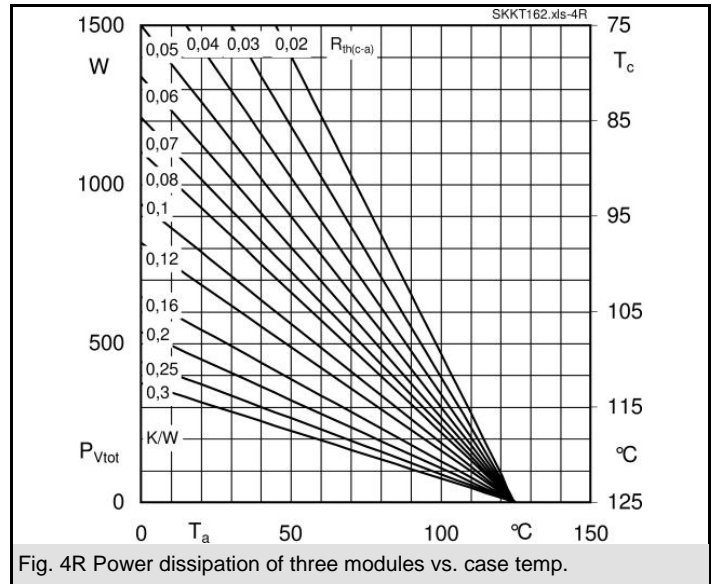

SKKT 162, SKKH 162

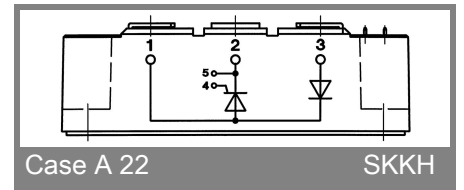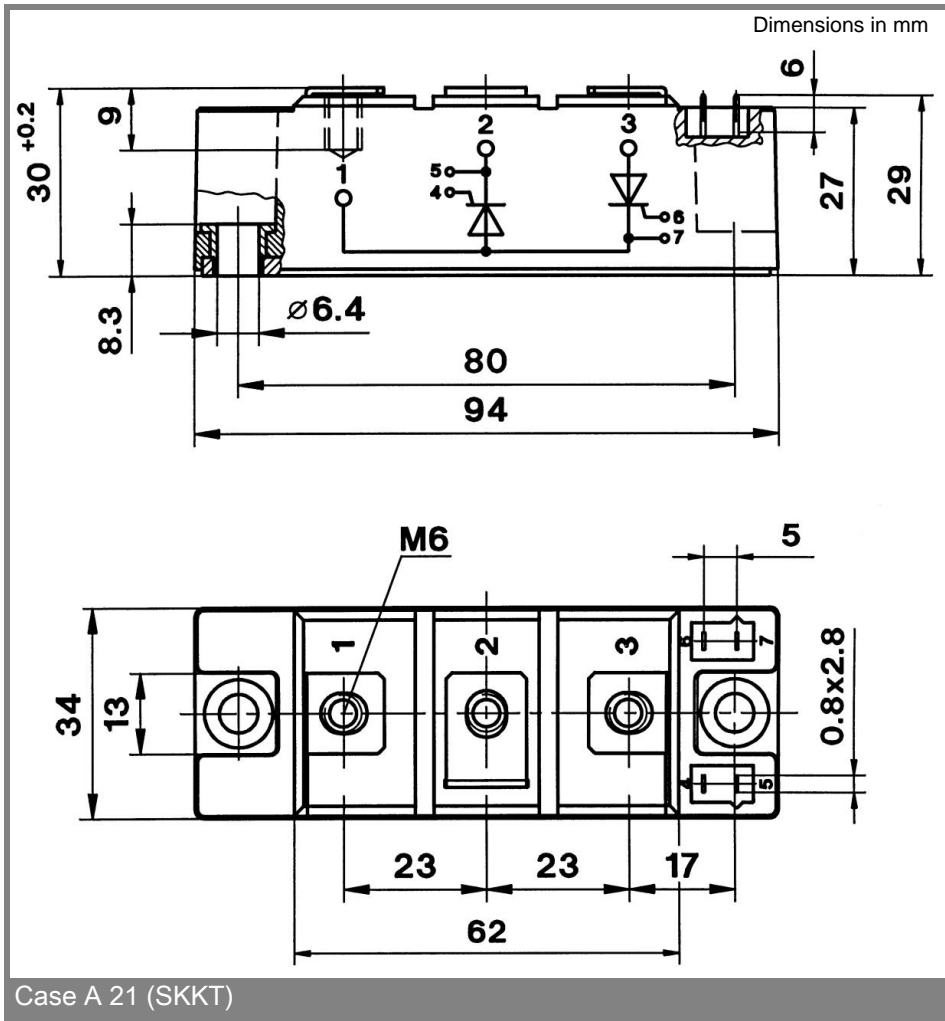

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.